





70" Interactive LCD Touchscreen with integrated annotation software and USB playback

The TH7067MIS-B2AG is a 70", 10-point touchscreen with integrated interactive EasiNote writing software allowing users to make annotations on files opened directly from a USB device or internal storage. The display supports also playback of presentations, video and almost any other type of content stored on the USB device or internal memory. The high quality commercial UV²A LCD screen guarantees great viewing angles from all sides and delivers superb image performance from anywhere in a class or meeting-room. The Anti Glare screen drastically reduces ambient reflection in high brightness environments without compromising sharp clarity of the content. Unlike interactive whiteboards, there are no shadows or reductions in image performance to contend with. The TH7067MIS-B2AG is a perfect solution for educational and corporate use.



TOUCH TECHNOLOGY - INFRARED

The infrared technology uses infrared backlight. A touch event is registered with great accuracy when the infrared light is blocked by finger or stylus. This technology does not rely on an overlay or substrate, so it is impossible to physically "wear out" the touchscreen. Moreover the display characteristics remain virtually unaffected by the touch functionality.



NOTE

Make notes, sketch, draw, write and share your ideas with your team or students or save them to a cloud drive or USB-stick; collaboration was never easier. Turn your iiyama professional display into an interactive digital whiteboard with Note, our Android-based writing and annotation software.

1. DISPLAY CHARACTERISTICS

DIAGONAL

69.5"; 176.6cm

ASPECT RATIO	16 : 9
PANEL	UV ² A Direct LED, AG coated glass
NATIVE RESOLUTION	Full HD 1080p, 1920 x 1080 (2.1 megapixel)
BRIGHTNESS	350 cd/m ² typical
BRIGHTNESS	310 cd/m ² with touch panel
CONTRAST	4 000 : 1 with touch panel
RESPONSE TIME	5ms
VIEWING ZONE	horizontal/vertical: 176° / 176° ; right/left: 88° / 88° ; up/down: 88° / 88°
DISPLAY COLOUR	16.7 million
TOUCHTECHNOLOGY	infrared, multi touch (10 compatible touch points - HID, only with supported OS) activated by finger or pen, no pressure required to generate touch
TOUCH POINTS	10
GLASS THICKNESS	4 mm
LIGHT TRANSMITTANCE	88%
DISPLAY AREA H X W	865.62 x 1538.88 mm; 34.1" x 60.6"
PIXEL PITCH H X V	0.802 x 0.802 mm
HORIZONTAL SYNC	30 - 83kHz
VERTICAL SYNC	50 - 76Hz
SYNCHRONIZATION	Separate Sync
PIP (PICTURE IN PICTURE)	PIP
MAX. NON-STOP OPERATING TIME	24 hours/day

2. INTERFACES & CONNECTORS

VIDEO IN	3x VGA, DVI, 3x HDMI, AV
VIDEO OUT	VGA
AUDION IN	3x MiniJack
AUDIO OUT	Coax, MiniJack, speakers
CONTROLS	RS232C, RJ45 (LAN for Android), USB (touch)
USB MEDIA PLAYER	yes
INPUTS	LAN for Android, USB 2.0 & USB 3.0 (media playback / peripherals / storage)

3. FEATURES

PLUG & PLAY	VESA DDC2B™
CONTROLS	On-Screen-Display in 9 languages (EN, FR, ES, NL, DE, PL, RU, CZ, IT) controlled by side controls or a remote control
USER CONTROLS	input, brightness, volume (volume, bass, treble, balance, sound mode, mute), zoom (H-position, V-position, phase, clock, aspect ratio, auto), screen (brightness, contrast, sharpness, colour temp.), advanced (Ethernet, display, storage, apps, language & input, date & time, startup and shutdown, floating annotations, about)

SPEAKERS	2 x 10 W (Stereo)
REGULATIONS	CE, CB, CU, TÜV-Bauart
EXTRA FUNCTIONS	integrated, interactive annotation tools and applications allowing to browse the Internet, show documents, presentations, video, etc.
VESA MOUNTING	600 x 400 mm
COLOUR	Black
EXTERNAL CONTROLS	remote control
ORIENTATION	landscape
FANLESS DESIGN	yes
METAL BEZEL	yes
NOTE APPLICATION	yes

4. ACCESSORIES

DRIVER	multi-touch: Windows® 7/8/10, single-touch: XP, Vista, Linux, Mac OSX
INCLUDED ACCESSORIES	power cable, VGA signal cable, HDMI signal cable, USB cable, remote control, battery (2x), touch pen (3x), iiyama logo sticker, cable ties, quick start guide, safety guide
OPTIONAL ACCESSORIES	Wall mount MD 052B2000 (landscape)

5. POWER MANAGEMENT

POWER SUPPLY	AC 100 - 240 V, 50 / 60 Hz
POWER SUPPLY UNIT	internal
POWER USAGE	166.65 W typical; max. 0,5 W in Power management mode
POWER MANAGEMENT	VESA DPMS

6. EU ENERGY EFFICIENCY LABEL


ENERGY EFFICIENCY CLASS	B
ON MODE POWER CONSUMPTION	194W
ANNUAL ENERGY CONSUMPTION	283 kWh/annum*
VISIBLE SCREEN DIAGONAL	177 cm; 69.5"; (70" segment)

This is information under Regulation (EU) No 1062/2010.

**Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.*

7. DIMENSIONS & WEIGHT

DIMENSIONS W X H X D	1638 x 964.5 x 97.5 mm
WEIGHT	50.5 kg

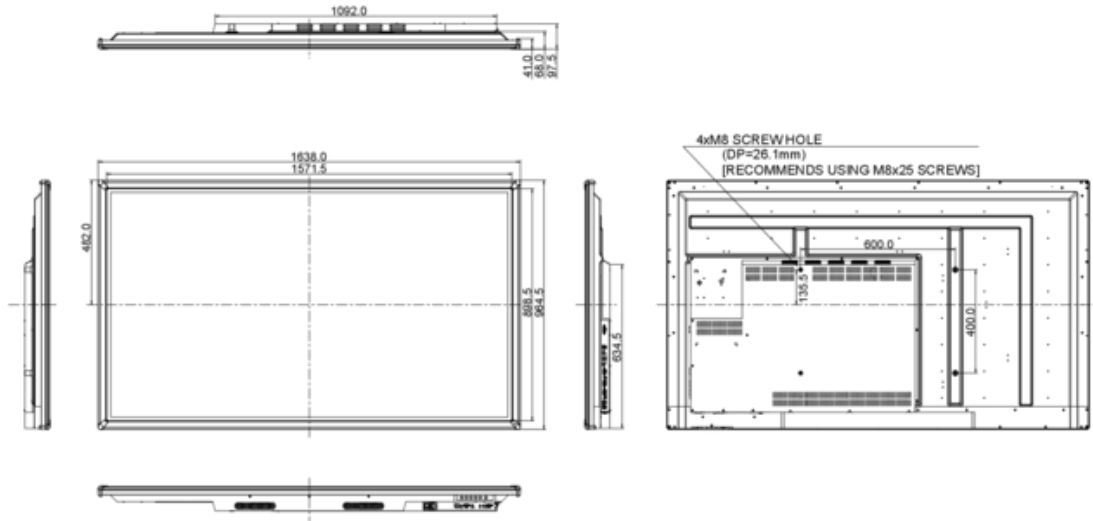

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION (). ALL RIGHTS RESERVED.